


# RUBBER SHEATHED FLEXIBLE CORDS



America/Canada

## S/SO/SOO/SOW/SOOW

Rubber Insulated and Jacketed Heater Cord  
 Rating : 105°C Rated temperature: 105°C  
 Voltage : 300V Rated volatage: 300V  
 Standard : UL62 Reference standard: UL62

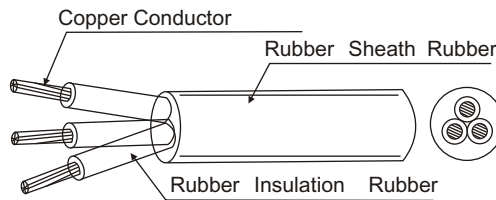

Type	NO. of conductor	Conductor		Insulation thickness (mm)	Sheath thickness (mm)	Overall diameter (mm)	Max Conductor resistance at 20°C Ω
		Normal area (mm <sup>2</sup> )	Construction (No./mm)				
S SO SOO SOW SOOW	2	18	47/0.15	0.76	1.52	8.9± 0.2	22.4
		16	42/0.20	0.76	1.52	9.5± 0.2	14.1
		14	66/0.20	1.14	2.03	13.0± 0.3	8.88
		12	67/0.25	1.14	2.41	14.7± 0.3	5.58
	3	18	47/0.15	0.76	1.52	9.3± 0.2	22.4
		16	42/0.20	0.76	1.52	10.0± 0.2	14.1
		14	66/0.20	1.14	2.03	13.6± 0.3	8.88
		12	67/0.25	1.14	2.41	15.5± 0.3	5.58
	4	18	47/0.15	0.76	1.52	10.0± 0.2	22.4
		16	42/0.20	0.76	1.52	10.7± 0.2	14.1
		14	66/0.20	1.14	2.03	14.8± 0.3	8.88
	5	18	47/0.15	0.76	2.03	13± 0.3	22.4
		16	42/0.20	0.76	2.03	14± 0.3	14.1
		14	66/0.20	1.14	2.41	17.9± 0.3	8.88
		12	67/0.25	1.14	2.41	19.6± 0.3	5.58