



# PVC INSULATED FLEXIBLE CORDS



America/Canada

## SJT/SJTO/SJTOO/SJTOW/SJTOOW/SJTW

PVC Insulated PVC Sheathed Cords  
 Rating : 60°C-105 °C  
 Voltage : 300V Rated volatage: 300V  
 Standards : UL62 Reference standard: UL62

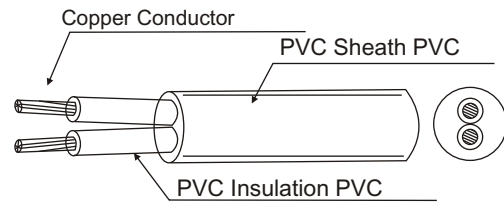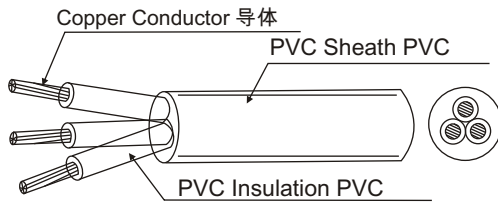

Type	NO. of conductor	Conductor		Insulation thickness (mm)	Sheath thickness (mm)	Overall diameter (mm)	Max Conductor resistance at 20°C Ω/km	
		Normal area (mm <sup>2</sup> )	Construction (No./mm)					
SJT SJTO SJTOO SJTOW SJTOOW	2	18	47/0.15	0.76	0.76	7.2±0 .1	22.4	
		17	59/0.15	0.76	0.76	7.4±0 .1	17.8	
		16	74/0.15	0.76	0.76	7.85±0 .1	14.1	
		15	48/0.21	0.76	0.76	8.3±0 .1	11.2	
		14	66/0.20	0.76	0.76	8.6±0 .1	8.88	
		12	67/0.25	0.76	1.14	9.7±0 .1	5.58	
	3	18	47/0.15	0.76	0.76	0.76	7.7±0 .1	22.4
		17	59/0.15	0.76	0.76	0.76	8.0±0 .1	17.8
		16	74/0.15	0.76	0.76	0.76	8.35±0 .1	14.1
		15	48/0.21	0.76	0.76	0.76	9.0±0 .1	11.2
		14	66/0.20	0.76	0.76	0.76	9.2±0 .1	8.88
		12	67/0.25	0.76	1.14	10.3±0 .15	5.58	
	4	18	47/0.15	0.76	0.76	0.76	8.35±0 .1	22.4
		17	59/0.15	0.76	0.76	0.76	8.75±0 .1	17.8
		16	74/0.15	0.76	0.76	0.76	9.0±0 .1	14.1
		15	48/0.21	0.76	0.76	0.76	9.6±0 .1	11.2
		14	66/0.20	0.76	0.76	0.76	10±0 .1	8.88
		12	67/0.25	0.76	1.14	12.2±0 .2	5.58	
	5	18	47/0.15	0.76	0.76	0.76	9.05±0 .1	22.4
		17	59/0.15	0.76	0.76	0.76	9.7±0 .1	17.8
16		74/0.15	0.76	0.76	0.76	10.0±0 .1	14.1	
15		48/0.21	0.76	0.76	0.76	11.2±0 .1	11.2	
14		66/0.20	0.76	0.76	0.76	11.75±0 .15	8.88	
12		67/0.25	0.76	1.14	13.3±0 .15	5.58		