



PVC INSULATED FLEXIBLE CORDS



America/Canada

ST/STO/STOO/STW/STOOW/STOW

PVC Insulated PVC Sheathed Cords
 Rating:600V 60 °C-105 °C
 Standard:UL62 CSA-C22.2

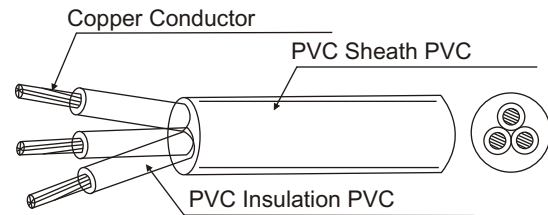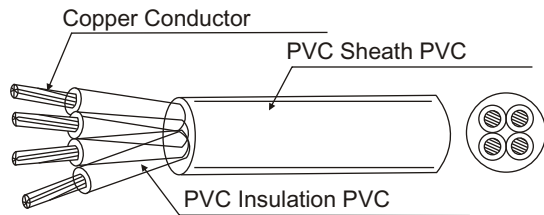

Specification		Conductor Construction (No./mm)	Insulation thickness (mm)	Sheath thickness (mm)	Overall diameter (mm)	Max Conductor resistance at 20°C Ω /km
NO.of core	AWG					
2	18	47/0.15	0.76	1.52	8.75±0 .1	22.05
	16	42/0.20	0.76	1.52	9.4±0 .1	13.85
	14	66/0.20	1.14	2.03	12.7±0 .15	8.7
	12	67/0.25	1.14	2.41	14.55±0 .15	5.48
3	18	47/0.15	0.76	1.52	9.3±0 .1	22.05
	16	42/0.20	0.76	1.52	9.9±0 .1	13.85
	14	66/0.20	1.14	2.03	13.35±0 .15	8.7
	12	67/0.25	1.14	2.41	15.3±0 .15	5.48
4	18	47/0.15	0.76	1.52	9.9±0 .1	22.05
	16	42/0.20	0.76	1.52	10.55±0 .15	13.85
	14	66/0.20	1.14	2.03	14.35±0 .15	8.7
	12	67/0.25	1.14	2.41	16.5±0 .15	5.48
5	18	47/0.15	0.76	1.52	11.65±0 .15	22.05
	16	42/0.20	0.76	1.52	12.55±0 .15	13.85
	14	66/0.20	1.14	2.03	16.35±0 .15	8.7
	12	67/0.25	1.14	2.41	17.9±0 .15	5.48