



# TPE SHEATHED FLEXIBLE CORDS



America/Canada

## SE/SEO/SEOO/SEW/SEOW/SEOOW

Rubber Insulated and Jacketed Heater Cord  
 Rating : 105°C Rated temperature: 105°C  
 Voltage : 600V Rated voltage: 600V  
 Standard : UL62 UL1581 Used Specialty

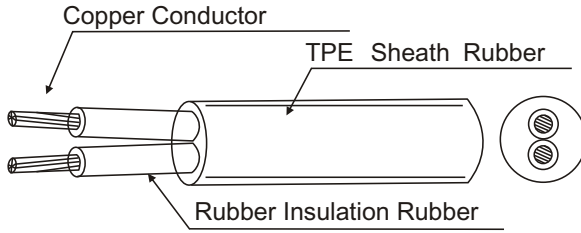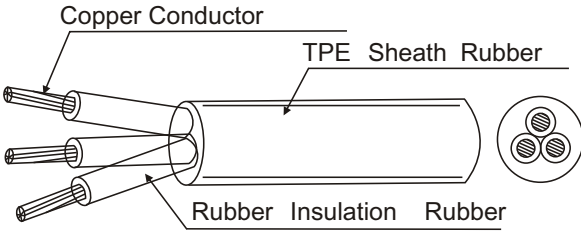

Type	NO. of	Conductor		Insulation thickness (mm)	Sheath diameter (mm)	Overall diameter Min(mm)		Max Conductor resistance at 20 °C Ω/km
		Normal area (mm <sup>2</sup> )	Construction (No./mm)			Min	Max	
SE SEO SEOO SEW SEOW SEOOW	2.00	16.00	26x0.248	0.76	1.52	9.27	10.41	14.10
		14.00	41x0.248	1.14	2.03	12.57	13.97	8.88
		12.00	65x0.248	1.14	2.41	14.35	15.88	5.58
		10.00	105x0.248	1.14	2.41	15.62	17.40	3.51
	3.00	18.00	16x0.248	0.76	1.52	9.14	10.16	22.40
		16.00	26x0.248	0.76	1.52	9.78	10.92	14.10
		14.00	41x0.248	1.14	2.03	13.21	14.60	8.88
		12.00	65x0.248	1.14	2.41	14.99	16.64	5.58
		10.00	105x0.248	1.14	2.41	16.51	18.29	3.51
		8.00	166x0.248	1.52	2.79	21.08	23.62	2.23
	4.00	6.00	266x0.248	1.52	3.18	24.64	27.94	1.41
		16.00	26x0.248	0.76	1.52	10.41	11.68	8.88
		14.00	41x0.248	1.14	2.03	14.22	15.75	5.58
		12.00	65x0.248	1.14	2.41	16.26	18.03	3.51
		10.00	105x0.248	1.14	2.41	17.78	19.68	2.23
		8.00	166x0.248	1.52	3.18	23.50	26.67	1.40
		6.00	266x0.248	1.52	3.56	26.67	30.48	1.40
		6x3+8x1	266x0.248	1.52	3.56	25.02	28.93	2.23
	166x0.248							