


# RUBBER SHEATHED FLEXIBLE CORDS



## EUROPE

### H03RT-H

Rubber Insulated and Braiding Flexible Cords  
 Rating:300/300V  
 Standard:DIN VDE - 14 HD22.14

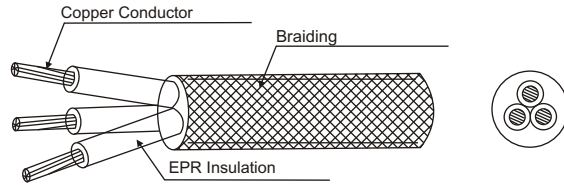

Type	Conductor		Insulation thickness (mm)	Sheath thickness (mm)	Overall diameter (mm)
	Normal area (mm <sup>2</sup> )	Construction (No./mm)			
H03RT-H	2x0.75	38/0.16	0.16	0.80	6.3±0.2
	2x1.0	50/0.16	0.16	0.80	6.8±0.2
	2x1.5	75/0.16	0.16	0.80	7.2±0.2
	3G0.75	38/0.16	0.16	0.80	6.8±0.2
	3G1.0	50/0.16	0.16	0.80	7.2±0.2
	3G1.5	85/0.16	0.16	0.80	7.8±0.2

Application: Used in Dry Places under Weak Mechanical Stress, e. g. Power Supply to Heating Plates, Irons & Electric Cookers