

RUBBER SHEATHED FLEXIBLE CORDS



EUROPE

H05BB-F





Rubber Insulated and Jacketed Heater Cord

Rating : 90°C Rated temperature: 90°C

Voltage : 300/500V Rated voltage: 300/500V

HD22.12 Reference standard: HD21.14

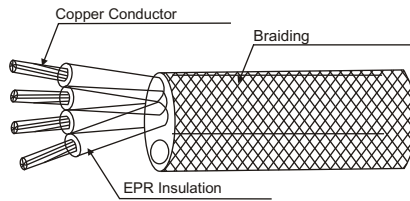

- 1: Copper conductor
- 2-4 Insulation
- 5: Sheath
- 6: (4*7EPDM)
- 7: Braiding

NO. of conductor	Conductor		Insulation thickness (mm)	Sheath thickness (mm)	Overall diameter (mm)	Max Conductor resistance at 20°C Ω /km
	Normal area (mm ²)	Construction (No./mm)				
2	0.75	42/0.15	0.6	0.8	5.7-7.4	26.0
	1.0	32/0.20	0.6	0.9	6.1-8.0	19.5
	1.5	48/0.20	0.8	1.0	7.6-9.8	13.3
	2.5	49/0.25	0.9	1.1	9.0-11.6	7.98
3	0.75	42/0.15	0.6	0.9	6.2-8.1	26.0
	1.0	32/0.20	0.6	0.9	6.5-8.5	19.5
	1.5	48/0.20	0.8	1.0	8.0-10.4	13.3
	2.5	49/0.25	0.9	1.1	9.6-12.4	7.98
4	0.75	42/0.15	0.6	0.9	6.8-8.8	26.0
	1.0	32/0.20	0.6	0.9	7.1-9.3	19.5
	1.5	48/0.20	0.8	1.1	9.0-11.6	13.3
	2.5	49/0.25	0.9	1.2	10.7-13.8	7.98