


# RUBBER SHEATHED FLEXIBLE CORDS



EUROPE

## HO5RN-F

Rubber Insulated and Sheathed Single Cords  
 Rating:300/500V  
 Standard:DIN VDE 0282-8 HD22.8

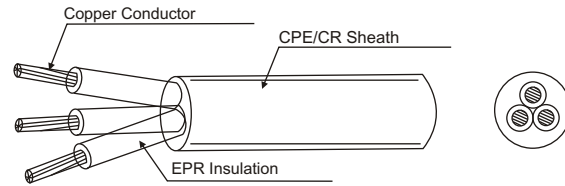

NO. of conductor	Conductor 导体		Insulation thickness (mm)	Sheath thickness (mm)	Overall diameter (mm)	Max Conductor resistance at 20°C	
	Normal area (mm <sup>2</sup> )	Construction (No./mm)				Ω /km	
						Bare	Tinned
1	0.75	24/0.20	0.8	0.8	4.6 ± 0.2	26.0	26.7
	1.0	32/0.20	0.8	0.8	4.8 ± 0.2	19.5	20.0
	1.5	30/0.25	0.8	0.8	5.1 ± 0.2	13.3	13.7
2	0.75	24/0.20	0.6	0.8	6.4 ± 0.2	26.0	26.7
	1.0	32/0.20	0.6	0.9	6.9 ± 0.2	19.5	20.0
3	0.75	24/0.20	0.6	0.9	7.0 ± 0.2	26.0	26.7
	1.0	32/0.20	0.6	0.9	7.4 ± 0.2	19.5	20.0