


# RUBBER SHEATHED FLEXIBLE CORDS



## EUROPE

### HO5RR-F

Rubber Insulated and Sheathed Flexible Cords  
 Rating:300/500V  
 Standard:DIN VDE 0282-4 HD22.4

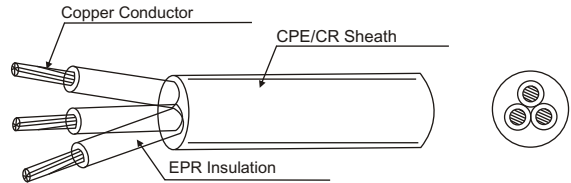

NO. of conductor	Conductor 导体		Insulation thickness (mm)	Sheath thickness (mm)	Overall diameter (mm)	Max Conductor resistance at 20°C	
	Normal area (mm <sup>2</sup> )	Construction (No./mm)				Ω /km	
						Bare	Tinned
2	0.75	24/0.20	0.6	0.8	6.4±0.2	26.0	26.7
	1.0	32/0.20	0.6	0.9	7.0±0.2	19.5	20.0
	1.5	30/0.25	0.8	1.0	8.7±0.2	13.3	13.7
	2.5	49/0.25	0.9	1.1	10.2±0.3	7.98	8.21
3	0.75	24/0.20	0.6	0.9	7.0±0.2	26.0	26.7
	1.0	32/0.20	0.6	0.9	7.4±0.2	19.5	20.0
	1.5	30/0.25	0.8	1.0	9.1±0.2	13.3	13.7
	2.5	49/0.25	0.9	1.1	10.8±0.3	7.98	8.21
	4.0	56/0.30	1.0	1.2	13.3±0.4	4.95	5.09
	6.0	84/0.30	1.0	1.4	15.4±0.5	3.30	3.39
4	0.75	24/0.20	0.6	0.9	7.7±0.2	26.0	26.7
	1.0	32/0.20	0.6	0.9	8.0±0.2	19.5	20.0
	1.5	30/0.25	0.8	1.1	10.1±0.3	13.3	13.7
	2.5	49/0.25	0.9	1.2	12.1±0.4	7.98	8.21
	4.0	56/0.30	1.0	1.3	14.8±0.5	4.95	5.09
	6.0	84/0.30	1.0	1.5	17.0±0.5	3.30	3.39