


RUBBER SHEATHED FLEXIBLE CORDS



EUROPE

HO7RN-F

Rubber Insulated and Sheathed Single Cords
 Rating:450/750V
 Standard:DIN VDE 0282-4 HD22.4

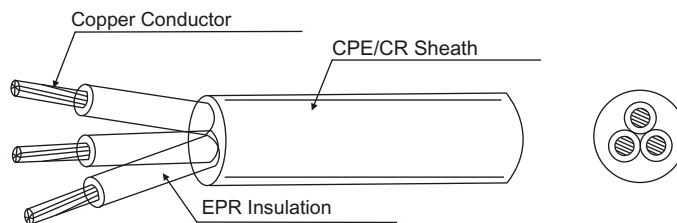

NO. of conductor	Conductor 导体		Insulation thickness (mm)	Sheath thickness (mm)	Overall diameter (mm)	Max Conductor resistance at 20°C	
	Normal area (mm ²)	Construction (No./mm)				Ω /km	
						Bare	Tinned
2	1.0	32/0.20	0.8	1.3	8.6±0.2	19.5	20.0
	1.5	30/0.25	0.8	1.5	9.6±0.2	13.3	13.7
	2.5	49/0.25	0.9	1.7	11.4±0.3	7.98	8.21
	4.0	56/0.30	1.0	1.8	13.4±0.4	4.95	5.09
	6.0	84/0.30	1.0	2.0	15.6±0.4	3.30	3.39
3	1.0	32/0.20	0.8	1.4	9.2±0.2	19.5	20.0
	1.5	30/0.25	0.8	1.6	10.3±0.3	13.3	13.7
	2.5	49/0.25	0.9	1.8	12.0±0.4	7.98	8.21
	4.0	56/0.30	1.0	1.9	14.4±0.4	4.95	5.09
	6.0	84/0.30	1.0	2.1	16.8±0.5	3.30	3.39
4	1.0	32/0.20	0.8	1.5	10.3±0.3	19.5	20.0
	1.5	30/0.25	0.8	1.7	11.3±0.3	13.3	13.7
	2.5	49/0.25	0.9	1.9	13.3±0.4	7.98	8.21
	4.0	56/0.30	1.0	2.0	15.9±0.4	4.95	5.09
	6.0	84/0.30	1.0	2.3	18.6±0.5	3.30	3.39