


RUBBER SHEATHED FLEXIBLE CORDS



JAPAN

HHFF

Rubber Insulated and Sheathed Flexible Cords
 Rating: 300V 60 °C
 Standard: JIS C 3301

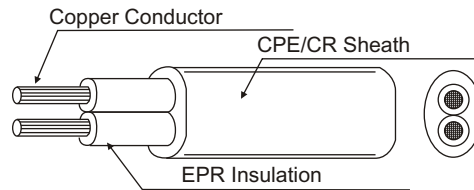

Type	Conductor		Nom. Thick (mm)	Overall diameter (mm)
	Normal area (mm ²)	Construction (No./mm)		
HHFF	2x0.75	30/0.18	1.0	3.2x6.4±0.15
	2x1.25	50/0.18	1.0	3.6x7.2±0.15
	2x2.0	37/0.26	1.0	3.9x7.8±0.15