



RUBBER SHEATHED FLEXIBLE CORDS



America/Canada

HSJ/HSJO/HSJOO/HSJOW/HSJOOW

Rubber Insulated and Jacketed Heater Cord
 Rating: 105°C Rated temperature: 105°C
 Voltage : 300V Rated voltage: 300V
 Standard : UL62 Reference standard: UL62

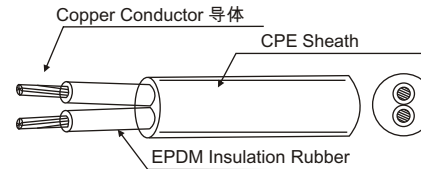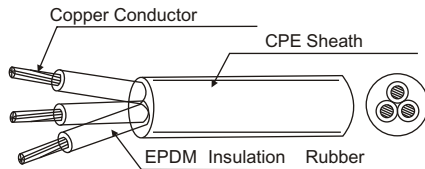

Type	NO. of conductor	Conductor		Insulation thickness (mm)	Sheath thickness (mm)	Overall diameter (mm)	Max Conductor resistance at 20°C	
		Normal area (mm ²)	Construction (No./mm)				/km	Ω
HSJ	2	18	47/0.15	0.76	0.76	7.45±0 .2	22.4	
		16	42/0.20	0.76	0.76	7.95±0 .2	14.1	
		14	66/0.20	1.14	0.76	10.9±0 .2	8.88	
		12	67/0.25	1.14	0.76	11.25±0 .3	5.58	
HSJO	3	18	47/0.15	0.76	0.76	7.85±0 .2	22.4	
HSJOO		16	42/0.20	0.76	0.76	8.5±0 .2	14.1	
HSJOW		14	66/0.20	1.14	0.76	10.9±0 .3	8.88	
HSJOOW		12	67/0.25	1.14	0.76	11.9±0 .3	5.58	
	4	18	47/0.15	0.76	0.76	8.6±0 .2	22.4	
		16	42/0.20	0.76	0.76	9.25±0 .3	14.1	
		14	66/0.20	1.14	0.76	11.9±0 .3	8.88	
		12	67/0.25	1.14	0.76	13.25±0 .3	5.58	