



TPE SHEATHED FLEXIBLE CORDS



America/Canada

SJE/SJEO/SJEOO/SJEW/SJEOOW

Rubber Insulated and Jacketed Heater Cord
 Rating : 105°C Rated temperature: 105°C
 Voltage : 300V Rated volatage: 300V
 Standards : UL62 Reference standard: UL62

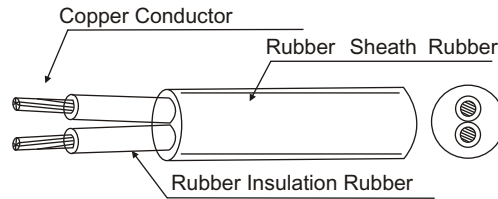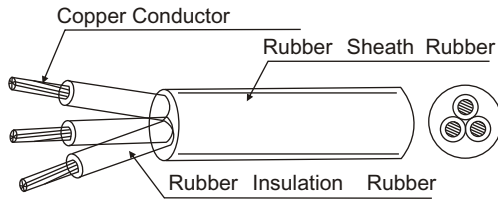

Type	NO. of conductor	Conductor		Insulation thickness (mm)	Sheath thickness (mm)	Overall diameter (mm)		
		Normal area (mm ²)	Construction (No./mm)					
SJE	18	2C	41/0.16	0.76	2.7	7.6		
		3C	41/0.16	0.76	2.7	7.8		
		4C	41/0.16	0.76	2.7	8.4		
		5C	41/0.16	0.76	2.7	9.8		
SJEO	17	2C	52/0.16	0.76	2.9	7.8		
		3C	52/0.16	0.76	2.9	8.2		
		4C	52/0.16	0.76	2.9	8.8		
SJEOO	16	5C	52/0.16	0.76	2.9	10.1		
		2C	65/0.16	0.76	3.1	7.90		
		3C	65/0.16	0.76	3.1	8.40		
SJEW	16	4C	65/0.16	0.76	3.1	9.0		
		5C	65/0.16	0.76	3.1	10.5		
		SJEOOW	14	2C	41/0.254	0.76	3.4	8.7
				3C	41/0.254	0.76	3.4	9.3
4C	41/0.254			0.76	3.4	10.1		
5C	41/0.254			0.76	3.4	11.8		
SJEOOW	12	2C	65/0.254	0.76	3.85	10.5		
		3C	65/0.254	0.76	3.85	11.0		
		4C	65/0.254	0.76	3.85	12.1		
		5C	65/0.254	0.76	3.85	14.0		